


ZoneHeat—Zone Parallel Heating Tape



Description


A zone parallel heating tape manufactured to meet the quality standards of BS6351. ZoneHeat can be cut-to-length on site and individual circuits produced with connection and end seal termination kits. Designed specifically for frost protection applications.

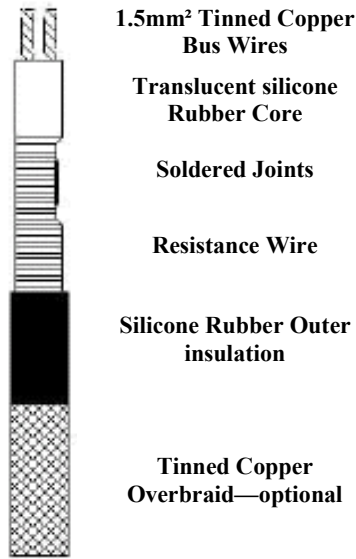

- A. **Option 1:** Available on a reel to be cut-to-length
- B. **Option 2:** Available made to order by the factory terminated circuit lengths ready for immediate installation.
- C. Built in 1m cold tail
- D. 230 and 110V versions
- E. Toughest grade silicone rubber electrical insulation
- F. High temperature lead free soldered Joints
- G. Easy location for heating zones
- H. Straight forward instructions to make site termination. Termination kit ZK-1.

Type	Available Loading (watts/m)	Voltage
Zoneheat	10/15/20/30 40W	230/110V

ZONE PARALLEL HEATING TAPE CIRCUITRY

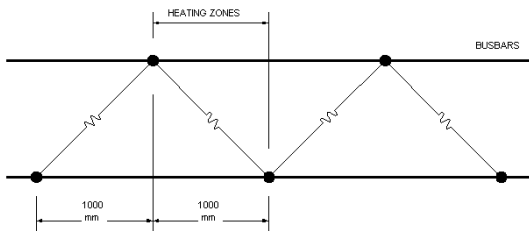

Specification

Thickness	:5mm
Width	:10mm
Min. Withstand Temperature	:-40degC
Max. Withstand Temperature	:+200degC
Bus Wires	:1.5mm ²
Core	:Silicone Rubber
Resistance Element	:80/20 Nickel/Chrome
Outer Insulation	:Silicone Rubber
Standard	:BS6351