
TECHNICAL SPECIFICATION SHEET

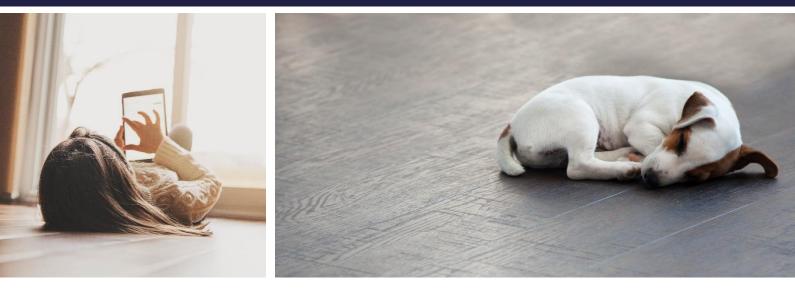

SNUG MAT 200W/ m^2

200MAT

Snug Mat 200W/m²

OVERVIEW

The Snug Mat is a triple-insulated Class 2 heating mat and is designed to be the single or primary heat source in a room. The twin conductor, single-connection heating cable is woven on to an adhesive backed fabric mesh that not only holds the heating cable together, but means the mat stays flat as soon as it's laid out to simplify installation.

Manufactured in a wide range of ready-made sizes and with the supply lead wire at one end only. This design offers maximum flexibility to the installer; is easy to plan and lay; and is suitable for large or small areas.



KEY FEATURES

- Extra powerful underfloor heating
- Designed to be the single or primary heat source
- Ideal in lounges, kitchens or conservatories
- Suitable under ceramic tile, slate, terracotta, stone, limestone or marble
- One of the thinnest on the market at just 2mm
- Fully adhesive backed underfloor heating mat
- Available from 1m² to 15m²
- 3m cold lead
- FEP (Fluoropolymer) cable jacket
- Exceeds international standards
- One simple connection cable
- No electromagnetic fields
- Lifetime cable warranty

WWW.FIRST-TRACEHEATING.CO.UK SALES@FIRSTTRACE.CO.UK 01772 761333




SNUG MAT 200W/m²

SPECIFICATIONS

Output	200W/m ²
Output	2007//112
Thickness	2mm wire
Voltage	230V
Width	500mm
Warranty	Lifetime cable warranty
Protection Class	1 RCD
Max. Temperature Output	+80°C
Connection	One side connection
Net Colour	Blue
Distance Between Cable	80mm

WIRING SCHEMATIC DIAGRAM



INSTALLATION ADVICE

